



FEATURES

- Covers the band from 28.0 GHz to 31.0 GHz (in sub-bands)
- Remote Monitor & Control
- High gain and linearity
- Output power 10W or 20W
- Gain adjustment
- Output sample monitor port
- Temperature gain compensation
- Automatic over-temperature shutdown
- Automatic high reflected power shutdown
- Infinite VSWR protection
- Power factor correction
- CE Marking

OPTIONS

- Ethernet Interface
- Receive Reject Filter
- Redundant system


OVERVIEW

The AWMA-Ka series are the outdoor solid-state power amplifiers (SSPA's), operating in Ka-band frequency range. The amplifier is an integrated unit, complete with power supply and cooling system. Intended for outdoor operation, the AWMA-2000Ka® are weatherproof and provide the utmost in convenience and efficiency. Built-in microprocessor controller provides the capability for serial port interfaces (RS232/485) for remote monitoring and control.

Advantech's hub-mount SSPA's set the industry standard for linearity and operating efficiency. Built-in design features and assembly methods incorporated with efficient combining techniques result in the trouble-free operation of the amplifier.

REDUNDANCY

With the addition of the appropriate waveguide and switch kit, the AWMA-2000Ka® amplifiers can be easily converted for the operation in 1:1 redundant configuration with full remote monitor and control capability of the redundant system via serial interface. A single Monitor and Control interface is required to manage redundant system.

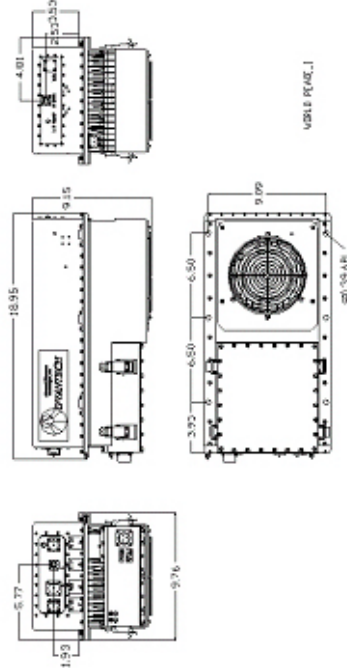

APPLICATION

The SSPA's are designed for Ka-band satellite up-link applications. They are mounted outdoors, near the hub of an antenna. The AWMA-Ka series are available in output power from 2W to 100W.

Other SSPA's are available for operation at other satellite frequency bands. Also available from Advantech are the SSPB series with all the features of the AWMA-Ka plus a built-in block up-converter. Please contact Advantech AMT for more information.



Ka-BAND HUB-MOUNT SSPA
 10W TO 20W
 AWMA-2000Ka[®] series



Ka-band Low Power SSPA

TECHNICAL SPECIFICATIONS		10W	20W
Electrical Characteristics			
Frequency range		28.0 – 31.0 GHz (in sub-bands)	
Output power (P _{SAT}) (dBm)		+40 dBm	+43 dBm
Output power (P1dB) min. (dBm)		+39 dBm	+42 dBm
Conversion gain @ maximum setting		50 dB min	
Max input power without damage		+5 dBm	
Gain slope		0.04 dB/MHz, max	
Gain flatness		±2.0 dB max over 500 MHz, ± 0.5 dB over 40 MHz @25°C	
Gain variation over temperature		±1.5 dB over full operating range	
Gain variation over 24 hours		±0.25 dB max at constant temperature & drive level	
Gain adjustment range		20 dB min (1 dB steps)	
Input VSWR		1.4:1	
Output VSWR		1.4:1	
Noise Power Density		Transmit band: -70 dBW/4kHz Receive band: -150 dBW/4kHz (with optional RRF)	
Spurious at rated power		-65 dBc max	
Harmonics at rated power		-65 dBc max	
AM/PM conversion		<2°/dB @ 3 dB back-off	
Third order IMD (2 equal tones 5 MHz apart)		-24 dBc max @ 6 dB total back-off from rated P1dB	
Group Delay		Linear: 0.01 nsec/MHz max. Parabolic: 0.002 nsec/MHz ² max. Ripple: 0.5 nsec p-p max.	
Residual AM (F* - frequency in kHz)		0 -10 kHz -45 dBc 10 kHz -500 kHz -20 (1.25+log F*) dBc 500 kHz - 1 MHz -85 dBc	
Power Requirements			
AC input voltage		110 /220 VAC (47-63 Hz)	
Power consumption, (nominal) (W)		350 W	500 W
Mechanical Characteristics			
Dimensions (L x W x H)		18.5" x 9.8" x 9.2"	
Weight (nominal)		40 lbs (18 kg)	
Interfaces:	RF input WR28 cover Discrete port MS3112E12-10P AC Line MS3102E20-19P	Redundancy MS3112E16-26P RS-232 MS3112E10-6P RS-485 MS3112E10-6P	RF output WR28 cover
Environmental Conditions			
Temperature	Operating Storage	-30°C to +55°C <i>Option 1: -40°C to +55°C; option 2: -50°C to +50°C</i> -55°C to +85°C	
Humidity		100%, condensing (2" rain/hour)	
Altitude		10,000' AMSL, derated 2°C/1,000' from AMSL	



PB-WM420-01 Rev.02 issued 1/19/2006

Specifications are subject to change without notice

An ISO9001: 2000 Company



CANADA

657 Orly Avenue
 Dorval, Quebec
 Canada H9P 1G1
 Tel.: (514) 420-0045
 Fax: (514) 420-0073
 Email: Sales@AdvantechAMT.com

EUROPE

39Edison Road
 St.Ives Huntingdon, Cambridgeshire
 United Kingdom PE27 3LF
 Tel.: +44 (1480) 357 600
 Fax: +44 (1480) 357 601
 Email: Sales.Europe@AdvantechAMT.com

UNITED STATES

4710 E. Elwood Street, Suite 14
 Phoenix, Arizona
 United States 85040
 Tel.: +1 (480) 784 4646
 Fax: +1 (480) 784 1010
 Email: Sales@AdvantechAMT.com