

FEATURES

- Covers the band from 28.0 GHz to 31.0 GHz (in sub-bands)
- Remote Monitor & Control
- High gain and linearity
- Output power 40W or 50W
- Gain adjustment
- Output sample monitor port
- Temperature gain compensation
- Automatic over-temperature shutdown
- Automatic high reflected power shutdown
- Infinite VSWR protection
- Power factor correction
- CE Marking

OPTIONS

- Ethernet Interface
- Receive Reject Filter
- Redundant system


OVERVIEW

The AWMA-Ka series are the outdoor solid-state power amplifiers (SSPA's), operating in Ka-band frequency range. The amplifier is an integrated unit, complete with power supply and cooling system. Intended for outdoor operation, the AWMA-3000Ka® are weatherproof and provide the utmost in convenience and efficiency. Built-in microprocessor controller provides the capability for serial port interfaces (RS232/485) for remote monitoring and control.

Advantech's hub-mount SSPA's set the industry standard for linearity and operating efficiency. Built-in design features and assembly methods incorporated with efficient combining techniques result in the trouble-free operation of the amplifier.

REDUNDANCY

With the addition of the appropriate waveguide and switch kit, the AWMA-3000Ka® amplifiers can be easily converted for the operation in 1:1 redundant configuration with full remote monitor and control capability of the redundant system via serial interface. A single Monitor and Control interface is required to manage redundant system.

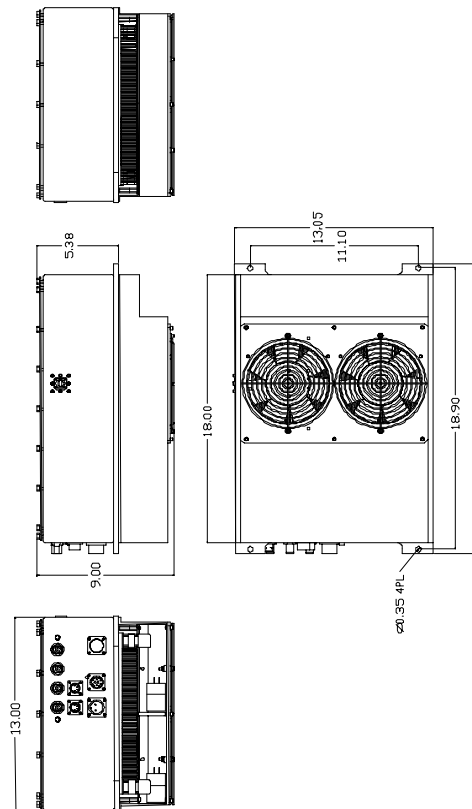

APPLICATION

The SSPA's are designed for Ka-band satellite up-link applications. They are mounted outdoors, near the hub of an antenna. The AWMA-Ka series are available in output power from 2W to 100W.

Other SSPA's are available for operation at other satellite frequency bands. Also available from Advantech are the SSPB series with all the features of the AWMA-Ka plus a built-in block up-converter. Please contact Advantech AMT for more information.



Ka-BAND HUB-MOUNT SSPA
40W TO 50W
AWMA-3000Ka® series



TECHNICAL SPECIFICATIONS		40W	50W			
Electrical Characteristics						
Frequency range	28.0 – 31.0 GHz (in sub-bands)					
Output power (P _{SAT}) (dBm)	+46 dBm		+47 dBm			
Output power (P1dB) min. (dBm)	+45 dBm		+46 dBm			
Conversion gain @ maximum setting	56 dB min					
Max input power without damage	+5 dBm					
Gain slope	0.04 dB/MHz, max					
Gain flatness	±2.0 dB max over 500 MHz, ± 0.5 dB over 40 MHz @25°C					
Gain variation over temperature	±1.5 dB over full operating range					
Gain variation over 24 hours	±0.25 dB max at constant temperature & drive level					
Gain adjustment range	20 dB min (1 dB steps)					
Input VSWR	1.4:1					
Output VSWR	1.4:1					
Noise Power Density	Transmit band: -70 dBW/4kHz Receive band: -150 dBW/4kHz (with optional RRF)					
Spurious at rated power	-65 dBc max					
Harmonics at rated power	-65 dBc max					
AM/PM conversion	<2°/dB @ 3 dB back-off					
Third order IMD (2 equal tones 5 MHz apart)	-24 dBc max @ 6 dB total back-off from rated P1dB					
Group Delay	Linear: 0.01 nsec/MHz max. Parabolic: 0.002 nsec/MHz ² max. Ripple: 0.5 nsec p-p max.					
Residual AM (F* - frequency in kHz)	0 -10 kHz -45 dBc 10 kHz -500 kHz -20 (1.25+log F*) dBc 500 kHz - 1 MHz -85 dBc					
Power Requirements						
AC input voltage	110 /220 VAC (47-63 Hz)					
Power consumption, (nominal) (W)	800		950			
Mechanical Characteristics						
Dimensions (L x W x H)	19" x 13" x 9"					
Weight (nominal)	55 lbs (25 kg)					
Interfaces:	RF input	WR28 cover	Redundancy	MS3112E16-26P	RF output	WR28 cover
	Discrete port	MS3112E12-10P	RS-232	MS3112E10-6P		
	AC Line	MS3102E20-19P	RS-485	MS3112E10-6P		
Environmental Conditions						
Temperature	Operating	-30°C to +55°C				
	Storage	-55°C to +85°C				
Humidity	100%, condensing (2" rain/hour)					
Altitude	10,000' AMSL, derated 2°C/1,000' from AMSL					



PB-WM430-01 Rev.02 issued 1/18/2006

Specifications are subject to change without notice

An ISO9001: 2000 Company



CANADA

657 Orly Avenue
Dorval, Quebec
Canada H9P 1G1
Tel.: (514) 420-0045
Fax: (514) 420-0073
Email: Sales@AdvantechAMT.com

EUROPE

39Edison Road
St.Ives Huntington, Cambridgeshire
United Kingdom PE27 3LF
Tel.: +44 (1480) 357 600
Fax: +44 (1480) 357 601
Email: Sales.Europe@AdvantechAMT.com

UNITED STATES

4710 E. Elwood Street, Suite 14
Phoenix, Arizona
United States 85040
Tel.: +1 (480) 784 4646
Fax: +1 (480) 784 1010
Email: Sales@AdvantechAMT.com