



FEATURES

- Converts L-Band to C (see table A)
- Integrated amplifier with an output power of 25W to 100W (see table A)
- Phase-locked oscillator to external 10MHz reference
- High linearity (low intermodulation products)
- Remote Monitor & Control
- Protection against thermal runaway and out-of-lock conditions
- Output sample monitoring port
- Built-in power supply
- Light weight
- Weatherproof package
- Compact packaging
- CE Marking

OPTIONS

- External Receive Reject Filter
- Remote M&C panel (Ethernet port optional)
- Handheld terminal

OVERVIEW

The SSPB-2100[®] series are hub-mount up-converter transmitters, operating in the C/X and Ku-Band. The SSPB-2100[®] is an integrated unit, complete with power supply, phase-locked oscillator, mixer, filter and cooling mechanism. Intended for outdoor operation, the SSPB-2100[®] provides the utmost in convenience and efficiency. Other SSPB's are also available for higher powers or for operation at other up-link frequencies.

The design of these units is based on ADVANTECH AMT[™] industry proven reliable solid-state high power amplifiers. The use of high efficiency power supply and conservative thermal designs contribute to the trouble-free operation of the amplifier. Built-in microprocessor controller provides the capability for serial port interfaces (RS232/485) for remote monitoring and control

APPLICATION

The SSPB-2100X[®] series converts an L-Band signal to the X-band frequency (see table A). Designed for satellite up-link applications, the SSPB series are available in output power from 1W to 500W. The SSPB-2100X[®] series are fully integrated units from 25W to 120W output power designed for mounting outdoors, near the hub of an antenna.

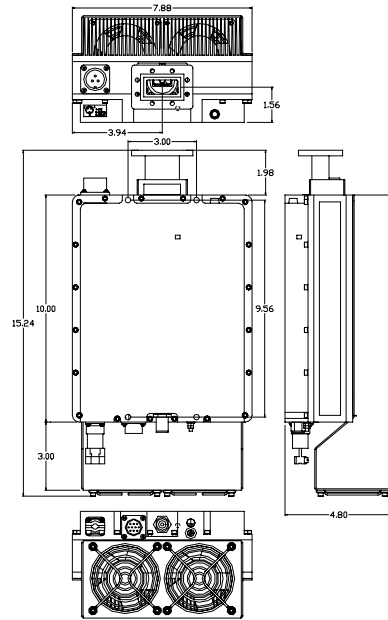


Figure 1: Outline 80-120 W units

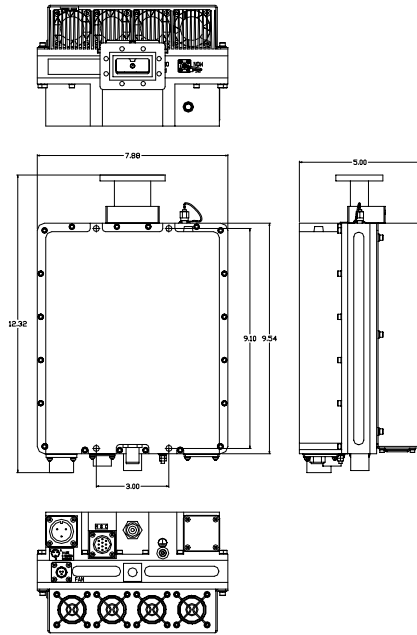


Figure 21: Outline 25-60 W units

Table A

Band	RF-Band (GHz)	IF-Band (MHz)	Output Power	LO GHz
X-Band	7.9 – 8.4	950 - 1450	25- 120	6.950



COMPACT X-Band Hubmount SSPB (BUC)
SSPB-2100X[®] series



TECHNICAL SPECIFICATIONS		25W	30W	40W	50W	60W	80W	100W	120W	
Electrical Characteristics										
Output power (P _{SAT})	dBm	+44	+45	+46	+47	+48	+49	+50	+51	
Output power (P _{1dB}) min	dBm	+43	+44	+45	+46	+47	+48	+49	+50	
Conversion gain @ maximum setting	dB	64	65	66	67	68	69	70	71	
Gain adjustment range		20 dB min								
Input/Output frequency range		See table A on front page								
Max input power without damage		+10 dBm								
Gain flatness		3 dB p-p, max over full band, 1.0 dB/40 MHz								
Gain variation over temperature		±1.5 dB over full operating range (temperature compensation mode)								
Gain variation over 24 hours		±0.5 dB max at constant temperature & drive level								
Input VSWR		1.5 :1 dB, min								
Output VSWR		1.5 :1 dB min,								
Noise power density (NPD)		-85 dBm/Hz in TX band -115 dBm/Hz in RX Band								
Spurious at rated power		-55 dBc, max								
AM/PM conversion		2.5°/dB typical (at P _{1dB})								
Third order IMD (2 tones)		-25 dBc, max at 3 dB back-off from P _{1dB}								
Local Oscillator frequency (LO)		See table A on front page								
LO leakage		-20 dBm max								
Phase noise		-50 dBc/Hz at 10Hz	-73 dBc/Hz at 1000Hz	-93 dBc/Hz at 100 kHz	-63 dBc/Hz at 100Hz	-83 dBc/Hz at 10 kHz	-105 dBc/Hz at 1 MHz			
Group delay (over any 40 MHz):	Linear Parabolic Ripple	0.02 ns /MHz, max 0.003 ns/MHz ² , max 1 nsec p-p, max								
External reference										
Reference frequency		10 MHz								
Reference frequency phase noise		-115 dBc/Hz at 10 Hz -135 dBc/Hz at 100 Hz -148 dBc/Hz at 1000 Hz				-155 dBc/Hz at 10 kHz -160 dBc/Hz at 100 kHz				
Reference frequency level		0 dBm ± 5 dB supplied via input L-Band cable								
Power Requirements										
AC input voltage		110 /220 VAC (47-63 Hz) auto-ranging (90-132 V / 180-264 V)								
Power consumption (W nominal)		150	180	200	300	350	400	450	500	
Mechanical Characteristics										
Dimensions (L x W x H)		10" x 8" x4.8" (254 x 203 x 114 mm)					DC 13" x 8" x4.8" (330 x 203 x 114 mm) AC 13" x 8" x5.2" (330 x 203 x 132 mm)			
Weight		14.4 lbs (6.5 kg)					18 lbs (8.2 kg)			
Interfaces:	RF input RF output	Type N (F) CPR112	RS-485/RS232 MS3112E12-10P			AC Line DC Line	MS3102R16-10P MS3102R16-10PX			
Environmental Conditions										
Temperature:	Operating Storage	-30°C to +55°C; Option: E-40°C to +55°C; G: -50°C to +50°C -55°C to +85°C								
Humidity		100%, condensing (2" rain/hour)								
Altitude		10,000' AMSL, de-rated 2°C/1,000' from AMSL								

United States
 1553 W Todd Dr, Suite 206
 Tempe, Arizona
 United States, 85283-4805
 Tel.: (480) 839-4136
 Fax: (480) 839-0860
 Email: Sales@AdvantechAMT.com

CANADA
 657 Orly Avenue
 Dorval, Quebec
 Canada H9P 1G1
 Tel.: (514) 420-0045
 Fax: (514) 420-0073
 Email: Sales@AdvantechAMT.com

EUROPE
 39 Edison Road
 St. Ives Huntingdon, Cambridgeshire
 United Kingdom PE27 3LF
 Tel.: +44 (1480) 357 600
 Fax: +44 (1480) 357 601
 Email: Sales.Europe@AdvantechAMT.com

