



TT1260

Transport Stream Processor

Contribution and distribution of video services requires decoding capability of premiere quality. The wide variety of scenarios in which such receivers are used require that the receiver must be extremely flexible in operation, and incorporate a large and sophisticated array of features. The TANDBERG Television TT1260 is a professional grade integrated receiver decoder, leading the field with a level of quality and large feature range that make the unit the perfect choice for contribution, distribution and mobile applications.

The TT1260 is designed to decode MPEG-2 SD 4:2:2 video and present it for onward use at the highest possible quality. Matching the high quality video capabilities, the TT1260 similarly supports all major professional audio standards. This highly flexible unit offers a vast array of input interface options - allowing the receiver to connect to almost every type of satellite, terrestrial, or telco network.

PRODUCT OVERVIEW

Flexibility

The TT1260 offers a vast variety of input interface options, making the unit suitable for connecting to almost every type of network. Highlights include support for the new DVB-S2 standard as well as legacy DVB-S and DVB-DSNG satellite transmission standards. For connection to telco networks, the receiver can also be fitted with G.703 or IP inputs.

Secure Transmission

Security of content is all-important - something that is taken seriously by the TT1260. The TT1260 supports all major encryption systems including BISS 1 & E, RAS, Common Interface and TANDBERG DirectorV5 CA.

Low Cost of Operation

The TT1260 can be integrated into a TANDBERG DirectorV5 control system - enabling large populations of receivers to be remotely controlled over-air from a central location, simplifying the system control structure and reducing the need for costly on-site local operators.

Transfer of Private Data

As well as providing video and audio capabilities, the TT1260 also provides simultaneous carriage of additional data services. The TT1260 can receive several data formats including low-speed, high-speed and high-speed over IP data.

BASE UNIT FEATURES

TT1260 – Common Interface (TT1260/CIBAS)

The Common Interface (CI) version can accept one CA module (CAM) enabling the user to select the desired CA system and have the flexibility to change the CA system at a later stage.

TT1260 – Common Interface, 48Vdc (TT1260/CIBAS/48V)

Base unit as the TT1260/CIBAS but with 48Vdc power supply for telco installations.

TT1260 - Director (TT1260/DIRBAS)

The TANDBERG Director version of the TT1260 enables a secure transmission of valuable content with the added benefit of over-air control reducing the need for local operators.

Standard features for base units:

- Dual SDI output with embedded de-compressed audio and VBI
- Dual analog (PAL/NTSC) BNC outputs
- Dual ASI transport stream outputs
- Frame synchronization input
- Remote control via SNMP or web page
- Single alarm relay
- Descrambling of MPEG-4 AVC via a CAM
- CAM menu browsing via web browser

TT1260 MPEG-2 Standard Definition Integrated Receiver Decoder

HARDWARE OPTIONS

Transport Stream Inputs**ASI Input (TT1260/HWO/ASI)**

- 2 x ASI inputs, up to 160 Mbps data rate

COFDM Input (TT1260/HWO/COFDM678)

- DVB-T OFDM input, compatible with 6, 7, 8 MHz bandwidth signals

COFDM Diversity Input (TT1260/HWO/COFDM678D)

- Dual diversity input for DENG applications

QPSK Input (TT1260/HWO/QPSK)

- 2 x L-band DVB-S QPSK satellite inputs

QPSK and ASI Input (TT1260/HWO/QPSK/ASI)

- DVB-S QPSK satellite and ASI input module
- 2 x L-band inputs, 2 x ASI inputs

DVB-S2 Input (TT1260/HWO/DVBS2)

- 4 x L-band DVB-S QPSK satellite inputs
- DVB-S2 QPSK, 8PSK demodulation upgrade with license keys

DVB-S2 and ASI Input (TT1260/HWO/DVBS2/ASI)

- DVB-S QPSK satellite and ASI input module
- 4 x L-band inputs, 2 x ASI inputs
- DVB-S2 QPSK, 8PSK demodulation upgrade with license keys

DVB-S2, ASI, IF Inputs & Constellation Output (TT1260/HWO/DVBS2/ASI/IF/C)

- Perfect for up-link monitoring
- 3 x L-band inputs, 1 x IF input
- I/Q constellation output
- DVB-S QPSK demodulation
- DVB-S2 QPSK, 8PSK demodulation upgrade with license keys

Higher Order Modulation Input (TT1260/HWO/HOM)

- 4 x L-band inputs
- DVB-S BPSK, QPSK demodulation
- DVB-DSNG 8PSK, 16QAM demodulation with license keys

Higher Order Modulation Input & Constellation Output (TT1260/HWO/HOM/CONST)

- 4 x L-band inputs
- DVB-S BPSK, QPSK demodulation
- DVB-DSNG 8PSK, 16QAM demodulation with license keys
- I/Q constellation output

TTV G.703 Telco Interface (TT1260/HWO/G703)

- E3 or DS-3 inputs
- 34 or 45 Mbps rates

10/100 BaseT IP Input (TT1260/HWO/IP)

- MPEG Transport Stream over IP
- 1 x 10/100BaseT Ethernet input
- DVB IPI FEC support

10/100 BaseT IP Input w/FEC (TT1260/HWO/IP/PROFEC)

- MPEG Transport Stream over IP
- 1 x 10/100BaseT Ethernet input
- ProMPEG FEC with license key

100/1000 BaseT IP Input w/FEC (TT1260/HWO/IP/GIGE)

- MPEG Transport Stream over IP
- 2 x 100/1000BaseT Ethernet input
- Very low latency
- ProMPEG FEC with license key (check for availability)

ATM E3 Telco Interface (TT1260/HWO/ATM-E3)

- E3 data rates

ATM DS3 Telco Interface (TT1260/HWO/ATM-DS3)

- DS3 data rates

Alarm Relay (TT1260/HDC/ALRM)

- 5 Alarm relay contacts

High Speed Serial Data Output (TT1260/HWO/HSDATA)

- RS422 over 9-pin D-Type connector
- 2048kbit/s max data rate

SOFTWARE OPTIONS

Input Options**Low Symbol Rate License (TT1260/SWO/LSYM)**

- For input card: TT1260/HWO/QPSK
- Extends symbol rate range down to 300kSymbols/s

DVB-S2 QPSK License (TT1260/SWO/DVBS2/QPSK)

- Adds DVB-S2 QPSK capability to DVB-S2 input option card

DVB-S2 8PSK License (TT1260/SWO/DVBS2/8PSK)

- Adds DVB-S2 QPSK, 8PSK capability to DVB-S2 input option card

DVB-S2 Low Symbol Rate License (TT1260/SWO/DVBS2/LSYM)

- Enables DVB-S2 symbol rate of 1 to 5 Msyms

DVB-DSNG 8PSK License (TT1260/SWO/8PSK)

- Adds DVB-DSNG 8PSK capability to DVB-DSNG input option card

DVB-DSNG16QAM License (TT1260/SWO/16QAM)

- Adds DVB-DSNG 8PSK, 16QAM capability to DVB-DSNG input option card

ProMPEG FEC License (TT1260/SWO/IP/PROFEC)

- For: TT1260/HWO/IP/PROFEC
- Adds ProMPEG FEC capability

Data Transfer**High Speed Data over Ethernet (TT1260/SWO/HSEETHER)**

- Ideal for telephony, IP traffic, video streaming
- Uses TT1260's RJ-45 control port
- Up to 5 Mbps data rate

Conditional Access**BISS (TT1260/SWO/BISS)**

- BISS Mode 1 & E

RAS 1 (TT1260/SWO/RAS)

- TANDBERG Television RAS 1 Transport Stream CA protection

RAS 2 (TT1260/SWO/RAS2)

- TANDBERG Television RAS 2 Transport Stream CA protection

TANDBERG DirectorV5 (TT1260/SWO/DIRV5)

- TANDBERG DirectorV5 CA
- TANDBERG DirectorV5 over-air control
- TANDBERG DirectorV5 over-air software downloads

Provider Lock (TT1260/SWO/PROV/LOCK)

- Allows services listed by broadcaster ID to be displayed

Signal protection (TT1260/SWO/SP)

- TANDBERG Television Signal Protection Scrambling

Video/Audio Processing**4:2:0 only Operation (TT1260/SWO/420)**

- Limits TT1260 to MPEG-2 SD 4:2:0 video decoding operation only

Dolby Digital® Decoding (TT1260/SWO/DOLBY)

- Enables Dolby Digital® audio decoding

Audio Normalization License (TT1260/SWO/AUD/NORM)


- Audio level attenuation of decoded audio
- Adjusts analog, digital & embedded audio level
- Audio levels can be normalized across numerous channels

Other Software Options**Password Protection of Web Browser (TT1260/SWO/PW)**

- Protects Web browser from malicious or accidental changes

TT1260 MPEG-2 Standard Definition Integrated Receiver Decoder

SAMPLE CONFIGURATION

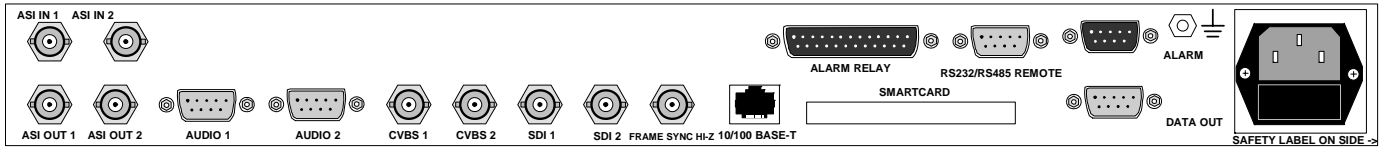

SPECIFICATIONS

Video and Audio Formats

Video

Decoding of one video service
422P@ML up to 50 Mbps
MP@ML up to 15 Mbps
(4:2:0 video only mode option available)

Audio

Decoding of two audio PIDs
Musicam: Analog and digital output
Linear 20bit PCM@48 kHz: Analog and digital output
Dolby® AC-3 2.0: Analog and digital output
Dolby® AC-3 5.1: Digital pass-through
Dolby® E: Digital pass-through
All de-compressed audio embedded in SDI
Dual Composite and Dual SDI video output
Simultaneous analogue and digital audio output
Extensive VBI support, including VBI in picture
VBI inserted in both composite and SDI output

Inputs

DVB QPSK Input

Standard: EN300 421
Connector: 2 x F-type (F), 75 Ohm
Frequency range: 950 - 2150MHz
Symbol rates: 1 - 45 Msyms
LNB power: 13V, 18V or off, 22 kHz on or off

DVB ASI Input

Standard: EN50083-9
Connector: 2 x BNC (F), 50Ω
Max input rate: 160 Mbps
Packet Length: Auto-detect 188/204 byte packets

TTV G.703

Connector: BNC (F)
Network: G.703 compliant PDH
Input: E3 or DS-3 (selectable)
Bit-rates: 34 or 45 Mbps versions

MPEG over IP

Connector: 1x RJ 45
Format: 10/100BaseT
FEC: ProMPEG

Gigabit MPEG over IP (Check availability)

Connector: 2x RJ 45
Format: 100/1000BaseT

FEC: ProMPEG

DVB-DSNG Higher Order Modulation

Standard: EN300 421, EN301 210
Connector: 4 x F-type (F), 75 Ohm
Frequency Range: 950 – 2150 MHz
Symbol Rate: 5 - 45 Msyms
FEC, BPSK/QPSK: 1/2, 2/3, 3/4, 5/6, 7/8
FEC, 8PSK: 2/3, 5/6, 8/9
FEC, 16QAM: 3/4, 7/8
LNB power: 13V, 18V or off, 22 kHz on or off

DVB-S2

Standard: EN300 421, EN302 307
Connector: 4 x F-Type (F), 75 Ohm
Frequency Range: 950 – 2150 MHz
Symbol Rate: 1 - 45 Msyms (DVB-S)
Symbol Rate: 5 - 31 Msyms (DVB-S2)
Symbol Rate: 1 - 31 Msyms (DVB-S2) (option)
Bit-rate: 81 Mbps Max (DVB-S2)
FEC, DVB-S: 1/2, 2/3, 3/4, 5/6, 7/8
FEC, DVB-S2 QPSK: 1/2, 3/5, 2/3, 3/4, 4/5, 5/6, 8/9, 9/10
FEC, DVB-S2 8PSK: 3/5, 2/3, 3/4, 5/6, 8/9, 9/10
DVB-S2 FEC Frames: Normal Frames
LNB power: 13V, 18V or off, 22 kHz on or off

DVBS2/ASI/IF/C Option

Inputs: 3x L-band
1x IF BNC (F) 75 Ohm
2x ASI BNC (F) 75 Ohm
IF Input Freq Range: 50 – 180 MHz (Monitor input)
Constellation Output: 2x BNC I/Q (F)

DVB-T COFDM Input

Connector: F-type (F), 75Ω
Frequency range: 47-862 MHz
Channel bandwidth: 6/7/8 MHz switchable
Carrier mode: 2K and 8K selectable
Carrier modulation: QPSK, 16QAM, 64QAM auto detected
Hierarchy: High/Low
Spectral inversion: Normal/Inverted

Frame Synchronization

Connector: BNC (F)

Outputs

DVB ASI Output

Connector: BNC (F) 75Ω

Sustained transport stream data rate: 160 Mbps
(CA system dependent)

Enable/disable descrambling of selected service

Data

RS-232 Low speed data (max. 38.4 Kbps)
RS-422 High speed data (max. 2048 Kbps)
Ethernet high speed data (max. 5000 Kbps)
Tandberg Proprietary Data Piping only

Alarm Relay

Alarm Relays (summary and user customizable)
Connector: 9D-type, (M)

Conditional Access Options

DVB Common Interface
TANDBERG Director V4, V5
TANDBERG RAS-1 & 2
BISS mode-1 & E
MPEG-4 decryption via DVB CI

Control

Front panel keypad and LCD
nCompass Control and Monitoring
Remote control via RS-232, TANDBERG remote control protocol
Remote control via RS-232 / RS-485, fully implemented Altea remote control protocol
TANDBERG Director inband remote control (only available with TANDBERG Director CA version)
Web browser control

Physical and Power

Dimensions (W x D x H)

435 x 275 x 44mm (17.2 x 10.75 x 1.75" approx.

Input Voltage

110/240 VAC or –48 VDC

Cooling

Integrated fan, units may be stacked on top of each other

Power Consumption

45W max. (depending on options fitted)

Environmental Conditions

Operating Temperature

0°C to +50°C (32° to 122°F) without DVB CI module

Relative Humidity

5 to 95%

Global Headquarters
TANDBERG Television, Inc
Tel: +1 (678) 812 6300
Email: americasales@tandbergtv.com

Asia Pacific Headquarters
TANDBERG Television
Tel: +852 2899 7000
Email: apacsales@tandbergtv.com

Australasia
TANDBERG Television
Tel: +61 2 8923 0400
Email: sales.anz@tandbergtv.com

EMEA Headquarters
TANDBERG Television Ltd
Tel: +44 (0)23 8048 4000
Email: salesdesk@tandbergtv.com
Website: www.tandbergtv.com